


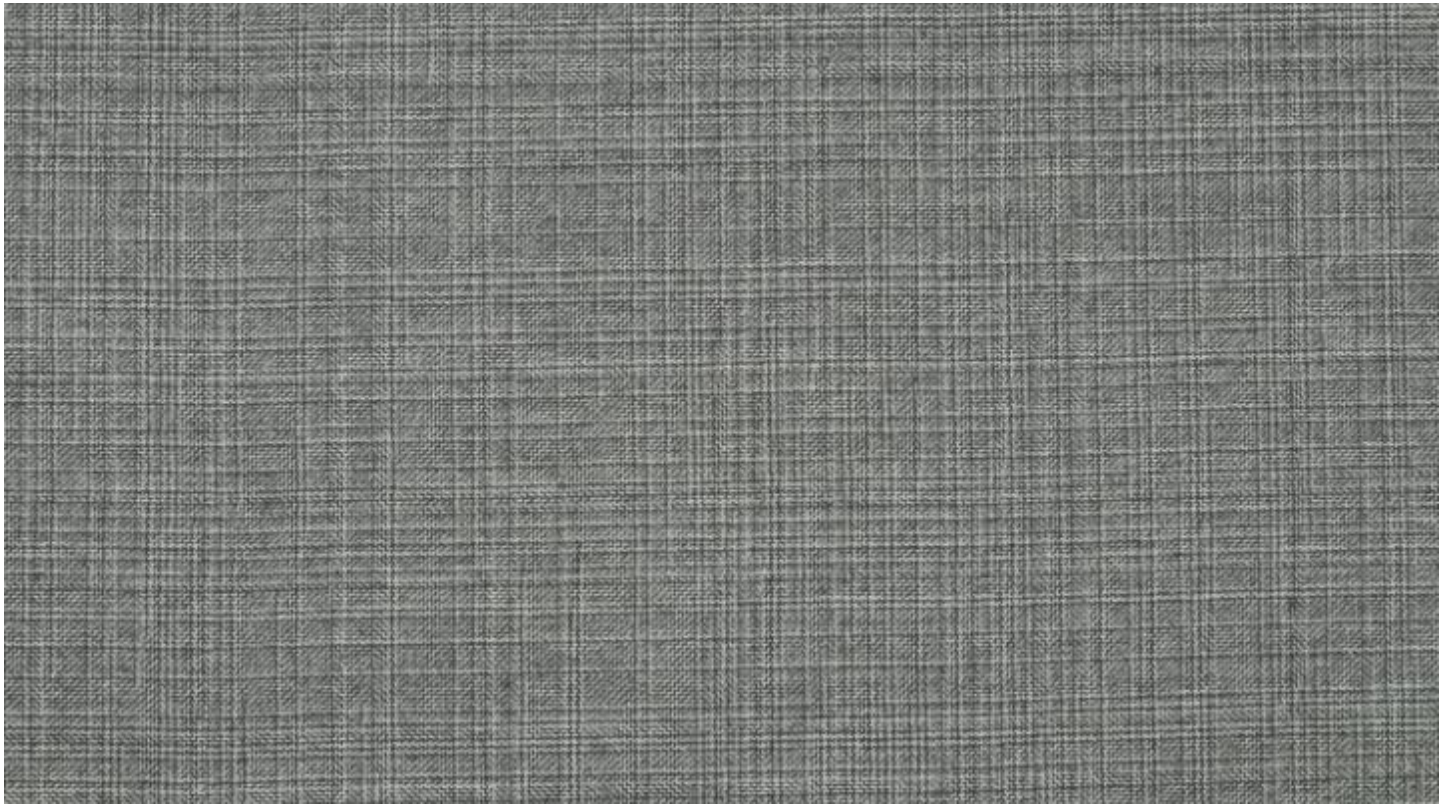

Funk CS

Trevira CS in retro vintage. Very good properties and Funk CS is eco-labelled with Eco Label.

Suitable for:

Accessories, Boat/Caravan, Contract upholstery, Curtains and Drapery, Upholstery



Fabric Funk CS 9106
Beach
1008501



Fabric Funk CS 9112
Caramel
1008502



Fabric Funk CS 9212
Latte
1008503



Fabric Funk CS 9216
Coffee
1008504



Fabric Funk CS 9605
Violet
1008512



Fabric Funk CS 9611
Purple
1008513



Fabric Funk CS 9407
Wine
1008511



Fabric Funk CS 9405
Rouge
1008510



Fabric Funk CS 9403
Brick
1008509



Fabric Funk CS 9314
Rust
1008508



Fabric Funk CS 9311
Peach
1008507



Fabric Funk CS 9307
Saffron
1008506



Fabric Funk CS 9301
Wheat
1008505



Fabric Funk CS 9711
Avocado
1008514



Fabric Funk CS 9713
Leafes
1008515



Fabric Funk CS 9715
Garden
1008516



Fabric Funk CS 9719
Grass
1008517



Fabric Funk CS 9721
Pike
1008518



Fabric Funk CS 9708
Laguna
1008519



Fabric Funk CS 9701
Fresh
1008520



Fabric Funk CS 9704
Pacific
1008521



Fabric Funk CS 9706
Petrol
1008522



Fabric Funk CS 9603
Sky
1008523




Fabric Funk CS 9613
Navy
1008524




Fabric Funk CS 9801
Lead
1008525




Fabric Funk CS 9804
Pepper
1008526



Fabric Funk CS 9806
Granite
1008527



Fabric Funk CS 9808
Stone
1008528



Fabric Funk CS 9810
Charcoal
1008529

Width:	140 cm ± 2 % cm
Content:	100% Trevira CS
Weight (g/m²):	400
Roll length (m):	50
Type:	Yarn dyed
Oeko-Tex Certificate No:	073313.O
Eco-Lable Certificate No:	IT/016/032
Fire class:	Cal TB 117, DIN 4102-1 B1, IMO 2010 FTP Code Part 8, M1, NF D 60-013, UNI 9175
Fire test with fire retardant foam:	BS 5852 Crib 5,EN 1021-1 & 2
Martindale:	70000 (ISO 12947-2)
Change of colour:	5
Pilling:	5 (ISO 12945-2)
Colour fastness to rubbing - dry:	4-5 (ISO 105-X12)
Colour fastness to rubbing - wet:	4-5 (ISO 105-X12)
Color Fastness To Light:	7 (ISO 105-B02)

Seam slippage Warp:	0,3 mm (ISO 13936-2)
Seam slippage Weft:	0,3 mm (ISO 13936-2)
Dimensional change Warp:	- 1,0 % (ISO 5077)
Dimensional change Weft:	- 2,5 % (ISO 5077)
Colour fastness to water wash:	ISO 105-C06
Staining, multi-fibre :	5
Change of colour:	5
Colour fastness to dry cleaning:	ISO 105-D01
Staining, multi-fibre:	5
Change of colour :	5
Colour fastness to waterspottning:	ISO 105-E16
Change of colour :	5
Colour fastness to perspiration:	ISO 105-E04
Staining, multi-fibre:	5
Change of colour:	5
Colour fastness to water:	5 (ISO 105-E01)

This material can be cleaned with disinfectants. Always test on a less visible surface before use. Approved active ingredients: Hydrogen peroxide 5%, 2-propanol 80%, Ethyl alcohol 80%, Sodium hypochlorite 0.5% (bleach), Chloramin-T 5%, Chlorhexidine 0.05%. Do not clean with anything other than what is recommended.

