




Marshall



**Textafoam** | Performance  
creativity in fabrics

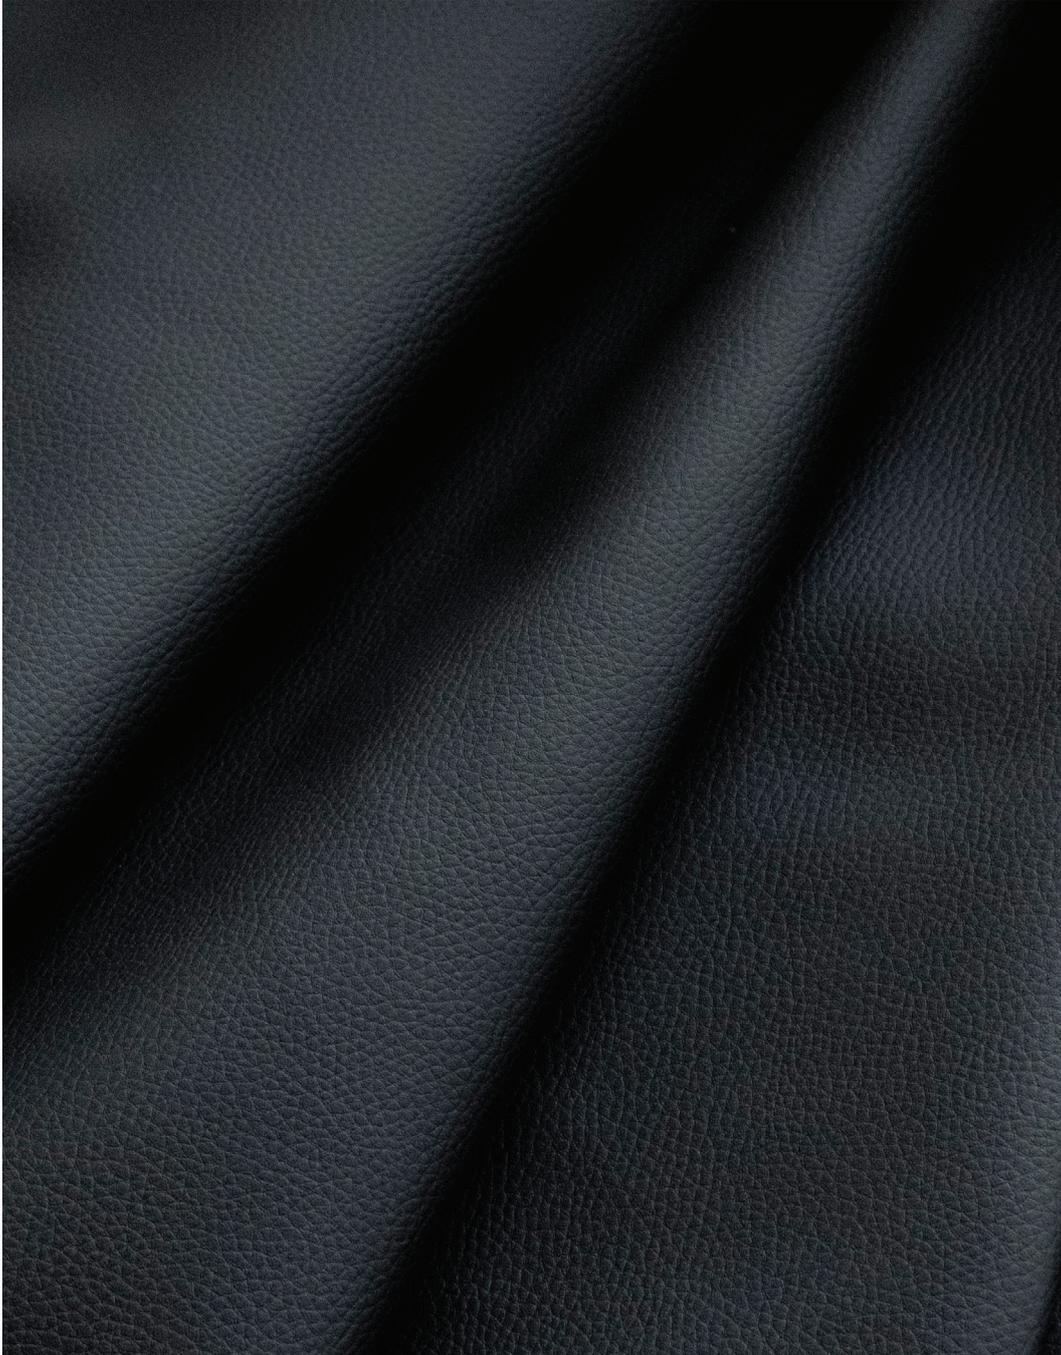

# Marshall

Marshall is an artificial leather quality from our Performance Collection.

This collection only consists of fabrics and leather looks that meet the highest standards in durability and maintenance. Making them long lasting, easy to clean as well as suitable for almost every type of upholstery.

The Marshall quality is resistant to water, UV light, Chlorin and alcohol. A perfect and strong alternative for real leather. Marshall is a great choice for heavy seating-areas such as, but not limited to, restaurants, hotels, waiting areas, holiday homes and caravans.

Passing the BS5852 cigarette (part 0) & match (part 1) as well as the EN1021 cigarette (part 1) & match (part 2) test, Marshall is a fire-safe choice.

This PVC-PU article is strong and durable. We embossed the leather grain with a roller. Available from stock in no less than 10 colours, Marshall will fit your every project design and furniture.

*Textaafoam<sup>originals</sup> Established in 1970, this Dutch family business brings together craftsmen in textiles and furniture design to build an unrivalled portfolio in upholstery fabrics that meets buyer's needs every time. Featuring a wide colour range, ultimate value for money and excellent reliability in the supply chain.*

## Composition

- / Faceside 97%PVC 3%PU
- / Backside 67%PES 33%CO
- / Artificial leather PVC/PU

## Suitable for

Sofa's, beds, chairs with fitted and loose fitting upholstery



plumb 168



lightgrey 60



ivory 101



black 61



beige 05



liver 10



taupe 12



wenge 192



cognac 28



chocolate 17

## Marshall - Article passport

Marshall is an artificial leather quality that will fit your every project design and furniture.

Available from stock in a wide range of contemporary and commercial colours.

### Product characteristics

Productgroup	artificial leather PVC/PU
Applications	sofa's, beds, chairs with fitted and loose fitting upholstery
Composition faceside	97%PVC 3%PU
Composition backside	67%PES 33%CO
Statistic Code	59031010
Bonding	woven
Dyeing method	piece dyed
Available colours	10

### Durability specifications

Test	Test Specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01	Norm DIN EN 15 618:2012-08
				DRY	WET		
Abrasion resistance of the equipment	DIN EN ISO 5470-2:2003-10, method 1, Crossbred	CTL	cycles	102 400: grade 1		after 51 200 cycles min. grade 2	A
Colour fastness to light	DIN EN ISO 105-B02:2014-11, Process 3, exposure level 5						
	light colours	CTL	grade	5		min. 5	B
	middle colours	CTL	grade	5		min. 5	B
Colour fastness to rubbing	DIN EN ISO 105-X12:2016-11						
	light colours	CTL	grade	5	5	dry: >4,5 wet: >4,5	A/A
	middle colours	CTL	grade	5	5	dry: >4,5 wet: >4,5	A/A
Colour fastness to rubbing	dark colours	CTL	grade	5	4-5	dry: >4,5 wet: >4,5	A/A
	Ignitability (cigarette test)	BS 5852 part 1 (1979) from The Furniture and Furnishing (Fire) (Safety) Regulations: 1988 No. 1324. Schedule 4 part 1. Ignition source 0: cigarette	Centexbel			passed	
	Ignitability (match test)	BS 5852 part 1 (1979) from The Furniture and Furnishing (Fire) (Safety) Regulations: 1988 No. 1324. Schedule 4 part 1. Ignition source 1: Match flame equivalent	Centexbel			passed	
Ignitability (match test)	DIN EN ISO 1021-1:2014. Source: Smouldering cigarette	Centexbel			passed		
Ignitability (match test)	DIN EN ISO 1021-2:2014. Source: Match flame equivalent	Centexbel			passed		

### Processing specifications

Minimum workable width in centimeters	± 138						
Roll length in meters	± 30						
Material weight in grams per linear meter	± 900						
Test	Test Specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01	Norm DIN EN 15 618:2012-08
				LENGTH	CROSS-WISE		
Tensile strength	DIN EN ISO 1421:2017-03, method 1	CTL	Newton	512	525	length: >380N crosswise: >280N	A/A
Tear growth resistance	DIN EN ISO 4674-1:2017-03, method A	CTL	Newton	37,4	55,0	length: >25N crosswise: >20N	C/A
Resistance to seam slippage	DIN EN ISO 13936-2:2004-07 180N load	CTL	mm	3,4	3,1	n/a	n/a
Coating adhesion	DIN EN ISO 2411:2018-02	CTL	Newton	42,8	36,5	length: >25N crosswise: >25N	A/A
Permanent creasing behaviour original	DIN EN ISO 32100:2019-02 100 000 cycles	CTL		O.K.: grade 0	O.K.: grade 0	length: >grade 1 crosswise: >grade 1	A
Permanent creasing behaviour after Hydrolysis (according to ISO 1419:2019-05, Method C)	DIN EN ISO 32100:2019-02 15 000 cycles after 14d, 70°C 95%rel. ah	CTL		O.K.: grade 0	O.K.: grade 0	n/a	n/a
Chemical substances	REACH	Centexbel				passed	

### Cleaning specifications



Dirt and Damp prevention treatment applied



**Textaafoam**  
creativity in fabrics

Textaafoam b.v.  
La Défense 11 | 5026 SC Tilburg  
P.O. Box 12 | 5050 AA Goirle  
The Netherlands

T +31(0)13 534 5934  
F +31(0)13 534 7586  
E info@textaafoam.nl  
www.textaafoam.nl