

## Nyx

NYX is aimed at those who are looking for a phthalate-free PVC with high technical specification, where the flexibility and choice of colours of the material is crucial. Extremely durable and suitable for both indoor and outdoor use, as well as marine, IMO.

## Suitable for:

Upholstery decoration, Boat & caravan upholstery, Furniture upholstery public environment, Furniture lining, Upholstery marine environment IMO


| Width:                            | 145 cm ±2 cm cm   |
|-----------------------------------|---|
| Content:                          | 100% PHTALATE FREE PVC  |
| Content Backing:                  | 100% Polyester  |
| Weight (g/m²):                    | $630 \pm 50 \text{ g/m}^2$  |
| Thickness (mm):                   | 1,2 mm ± 0,1 mm   |
| Roll length (m):                  | 25  |
| Fire class:                       | BS 5852 Source 0 & 1, Cal TB 117, DIN 75200,<br>EN 1021-1 & 2, FMVSS 302, IMO 2010 FTP Code<br>Part 8, ISO 3795 |
| Oeko-tex certificate number:      | 94.0.9993   |
| Martindale:                       | 300000 (ISO 5470-2)   |
| Colour fastness to rubbing - dry: | 5 (ISO 105-X12)   |

| Colour fastness to rubbing - wet: | 5 (ISO 105-X12)      |
|-----------------------------------|----------------------|
| Color Fastness To Light:          | ≥ 6 (ISO 105-B02)    |
| Flexing resistance:               | 50000 (DIN 53359)    |
| Tensile strength Warp:            | 383 N/5cm (ISO 1421) |
| Tensile strength Weft:            | 216 N/5cm (ISO 1421) |
| Tear strength warp:               | 26 N (ISO 4674-1)    |
| Tear Strength weft:               | 24 N (ISO 4674-1)    |
| Cold cracking restistance:        | -20°C (EN 1876-1)    |
| Water column:                     | 200 cmwc (ISO 811)   |
| Adhesion - surface finish Warp:   | 39 N/5cm (ISO 2411)  |
| Adhesion - surface finish Weft:   | 30 N/5cm (ISO 2411)  |

The product is cleaned with lukewarm PH-neutral soapy water and a soft cloth or soft brush. Wipe with a damp cloth afterwards. Do not use solvents or chemical cleaners. Alcoholic disinfectants can dry out the artificial leather. Any stains from ink, wine, coffee, oil, grease and coloring pigments from textiles must be removed immediately.

Please note that Nevotex does not accept complaints due to substandard maintenance or dry folding from jeans and other textiles.

Since this is a PVC product, a water-based contact adhesive should be used when gluing.

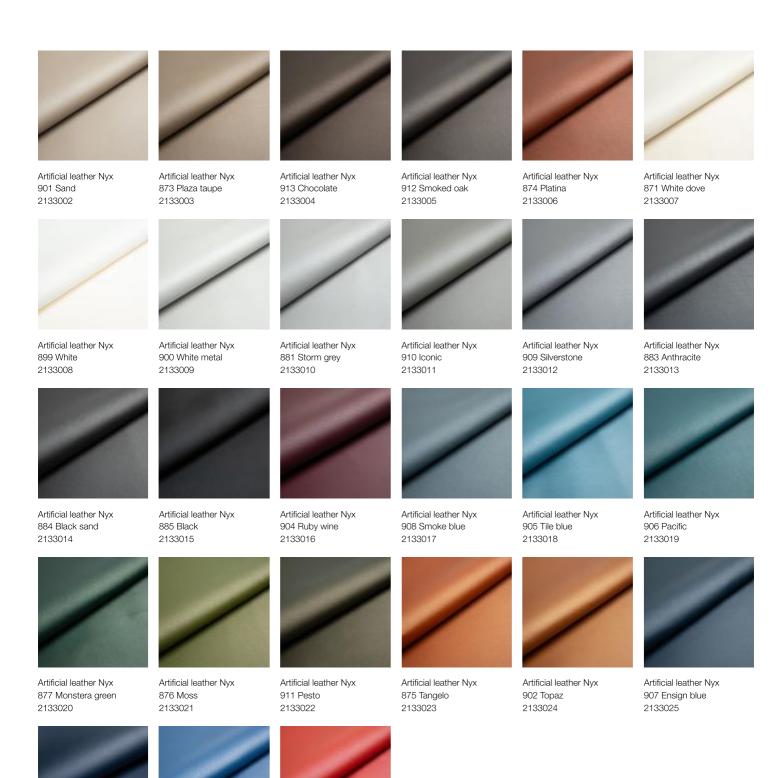

Artificial leather Nyx

903 Red

2133028

Artificial leather Nyx

878 Blue

2133027

Artificial leather Nyx

879 Navy

2133026